



ANALOGUE SERIES

Economical variable speed flow rate with simple speed control.

Achieve unparalleled efficiency, accuracy and convenience for your laboratory operations with our next-Gen series of basic peristaltic pump, featuring a digital display, variable speed flow rate designed, and more.

Features



3-Digit LED Display

Displays motor speed (RPM) at a glance



Timer Function

Simple dispense function with time range of 0.5 - 999 sec



Pump-head Design

Patented design makes operations easy & practical



Robust ABS Housing

Comes with UV spray coating for anti-corrosion & anti-static function



Surge Protection

Enables Soft starts without power surges



Bi-Directional Motor

Provides operational convenience in your process



2 way Control


Use Keypad or remote to start/stop, direction, & speed



Stacking Options

Increase productivity by stacking 2 pump heads on the same drive.

Dimension

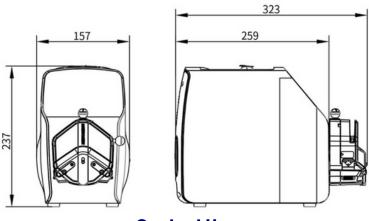

Contact Us

Specifications









Pump Model	Lab-I	Lab -II
Part No.	BP902011-005	BP902011-006
Flow Rate	0.005 - 2580 ml/min	0.18 - 3100 ml/min
Motor Speed	0.1 - 600 rpm	
Speed Resolution	0.1 rpm @ 100 rpm ; 1 rpm from 100-600	
Pump Head Stack	2	
Reversible (CW/CCW)	Yes	
External Control	0-5V, 0-10V, 4-20 mA	
Display	3 digit LED	
Control	Mechanical Keypad	
Housing Enclosure	ABS Plastic	
IP Rating	IP31	
Dimensions (LxWxH)	259 x 157 x 237 mm	
Power	230 VAC, 50/60 Hz	
Weight	4.40 kg	

Tube Size	Lab - I Flow rate (ml/min) 1.6 mm WT	Lab - II Flow rate (ml/min) 2.4 mm WT
0.8 mm	0.005 - 32	-
1.6 mm	0.027 - 162	-
3.1 mm	0.093 - 560	-
4.8 mm	0.196 - 1180	0.18 - 1080
6.4 mm	0.333 - 2000	0.27 - 1640
7.9 mm	0.43 - 2580	0.38 - 2300
9.6 mm	-	0.51 - 3100

Accessories -

Pump Head (1.6 mm WT)	BP902017-005
Pump Head (2.4 mm WT)	BP902017-006
Mounting Hardware (max. 2 pump heads)	BP902017-105

We also offer end-to-end Fluid management solutions including

Tubing I Fittings I Connectors I Single-Use Technologies and more.

Contact Us

